



Mobile Phone A2628 White Paper

Ericsson is the leading provider in the new telecoms world, with communications solutions that combine telecom and datacom technologies with freedom of mobility for the user. With more than 100,000 employees in 140 countries, Ericsson simplifies communications for its customers - network operators, service providers, enterprises and consumers - the world over.

Second edition (May 2001)

Publication number: EN/LZT 108 4546 R2A

This document is published by **Ericsson Mobile Communications AB**, without any warranty.

Improvements and changes to this text necessitated by typographical errors, inaccuracies of current information or improvements to programs and/or equipment, may be made by **Ericsson Mobile Communications AB** at any time and without notice. Such changes will, however, be incorporated into new editions of this document. Any hard copies of this document or any locally stored copies of this document are to be regarded as temporary reference copies only.

All rights reserved.

© Ericsson Mobile Communications AB, 2001

Contents

PREFACE	4
Purpose Of This Document	4
PRODUCT OVERVIEW	5
WAP SERVICES	6
Using WAP In The A2628.	6
Bearer Type Characteristics.	7
Gateway Characteristics	8
Connection-oriented And Connection-less WAP	8
Security Using WAP	8
Over-The-Air Provisioning Of WAP Settings.	9
Configuration Of WAP Settings	9
CONNECTIVITY	10
Infrared Modem	10
Cable Connection.	10
FUNCTIONS AND FEATURES	11
In-phone Functions And Features	11
Network-Dependent Features	13
SIM APPLICATION TOOLKIT	15
TERMINOLOGY AND ABBREVIATIONS	19
RELATED INFORMATION	21
APPENDIX: TECHNICAL SPECIFICATIONS ...	22

PREFACE

Purpose Of This Document

The Ericsson A2628 White Paper is designed to give the reader a deeper technical understanding of how the A2628 is designed, and of how it interacts with other media. This document will make it easier to integrate the A2628 with the IT and communications solutions of a company or organization.

People who can benefit from this document include:

- Corporate buyers
- IT Professionals
- Software developers
- Support engineers
- Business decision-makers

The best place to find all the extras you need to support your phone and daily life is at the Ericsson Mobile Internet, <http://mobileinternet.ericsson.com>. Here you will find downloadable ring tones, games, news, information, and a host of exciting links to other sites.

More information, useful for product, service and application developers, is published on the Ericsson Mobility World. The site at <http://www.ericsson.com/mobilityworld> contains up-to-date information about technologies, products and tools.

PRODUCT OVERVIEW

The A2628 is a Dual Band phone with a nickel metal hydride battery; a phone of modern design and advanced technology.

- It has a Wireless Application Protocol 1.1 (WAP 1.1) compliant browser, allowing fast and reliable access to Internet services with security according to WTLS class 2. Both access types, GSM Data and SMS, are supported.
- It supports SIM Application Toolkit (Online Services), which makes it possible for operators to provide new services to existing users over the air, including new menus and functions in the phone.
- Profiles feature; groups of settings preset to suit certain environments, such as "In Car", "Meeting", "Home".
- A full graphic display with an easy to navigate, user interface software.
- Numbered shortcuts make it possible to prepare settings into a favourite menu which the user can access quickly and easily.
- The Mobile Office DI 28 infrared modem (optional accessory) turns the A2628 into a wireless modem for data communication, Internet connection and fax from the user's PC or PDA.
- The RS-232 cable DRS-10 (optional accessory) can be used for connecting the A2628 to a PC.
- A wide range of accessories compatible with the A2628 are available from your local Ericsson sales representative.

WAP SERVICES

The typical WAP client is a small, portable device which is connected to a wireless network. This includes mobile phones, pagers, smart phones, PDAs and other small devices. In these devices, you have a limited user interface, low memory and computing power compared to desktop and laptop computers. The WAP browser in the A2628 is compliant with WAP 1.1 including security according to WTLS class 2. It is designed for WML and cannot read ordinary HTML pages, but it is suitable for interaction with customer services, e. g. ticket reservation. It is also handy when you want to access text-based information, such as timetables, share prices and exchange rates and Internet banking and other interactive services.


Using WAP In The A2628

The built-in WAP browser gives the user portable, fast and secure access to a wide variety of services, with the possibility of personalized services. WAP in the A2628 offers new opportunities to companies and service providers:

Bearer types	The A2628 accesses WAP over a standard GSM Data connection as well as over SMS. (Network-dependent services.)
Connection-oriented	Connection-less or connection-oriented WAP can be selected by the user. Connection-oriented WAP provides browsing with a high reliability.
Bandwidth efficiency	One of the key advantages WAP has over text-based HTML pages on mobile devices, is the bandwidth efficiency for communication. This is due partly to the fact that the WAP application is communicated to the wireless devices in the form of binary encoded data.
Provide settings	Using SMS messages, configuration settings can be sent over the air, OTA, so that the user does not need to configure the WAP access settings manually.
Creating WAP services	Creating a WAP service is no harder than creating an Intranet/Internet service today since WML and WMLScript are based on well-known Internet technology. New market segments can be addressed by launching innovative mobile Value Added Services.
Using standard tools	It is possible for the service creator to use standard tools like ASP or CGI to generate content dynamically. You can utilize existing investments in databases etc. that are the basis of existing Internet services. Create a service once and make it accessible on a broad range of wireless networks.
Maintain customer base	You can adapt existing Internet services to WAP. The actual binary encoding can be handled by the WAP Gateway which makes it possible to create WAP applications using the text-based language WML and other tools. In fact, existing HTML-based applications on the Internet can be viewed in the WAP browser, if an automatic conversion is performed in the WAP Gateway.
Improve productivity	Improve and simplify the communication flow within an organization by making information available to mobile users. A company or organization can use a WAP gateway to provide a secure connection to the company network for their users.
The WAP profiles	The A2628 holds several WAP profiles, each with a group of network settings and a home page. If you provide a corporate WAP service on your Intranet, it is useful to enter an Intranet WAP profile in user phones. The WAP profile holds network settings and user identification. The users switch easily between the corporate services and WAP services on the Internet, simply by switching WAP profile.

Bearer Type Characteristics

The phone accesses WAP services over SMS or IP, where IP is provided over GSM Data. Typical differences which distinguish the bearer types are listed below this diagram.

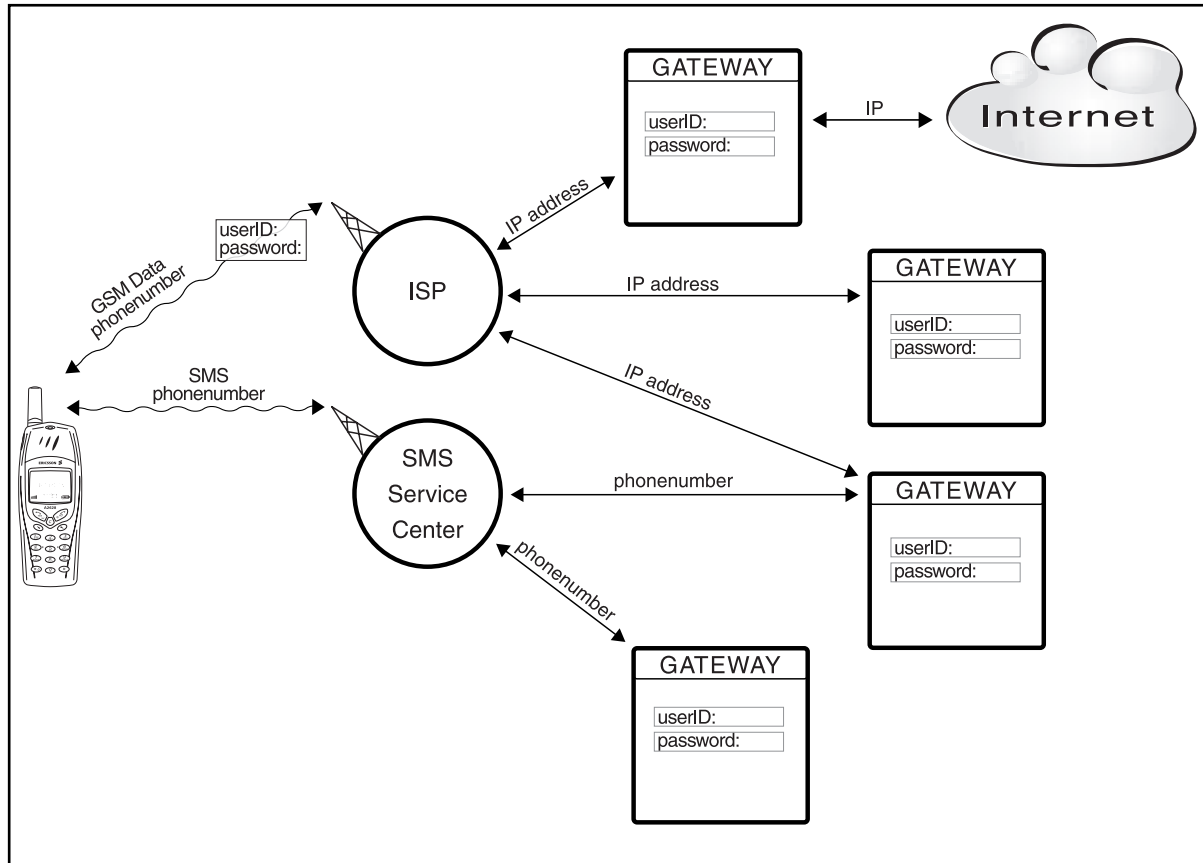

GSM Data Access

- Circuit connection of data call means that the phone is connected during the WAP session.
- Connection-oriented WAP (user option) uses error recovery services to provide high reliability.
- Comparably higher transmission speed than with SMS access.
- Pricing of GSM Data access can be compared to pricing of data calls in the network.
- GSM Data is suitable for Complex Pull services, Browsing and Data transfer.
- GSM Data is not suitable for Provisioning, Pager service.

SMS Access

- SMS point-to-point is used and not SMS Cell Broadcast.
- The connection is maintained by the automatic exchange of "messages" between the phone and the SMS Service Center.
- Comparably lower transmission speed than with GSM Data access.
- Pricing of SMS access can be compared to pricing of the normal SMS in the network.
- SMS is suitable for Messaging services, Info services, Provisioning.
- SMS is not suitable for Browsing or Data transfer.

Gateway Characteristics

The WAP Gateway provides services in the company's Intranet, a banking or stock trading service on the Internet, or access to other WAP applications on web addresses anywhere on the Internet. A Gateway is identified by an IP number or by a phone number, depending on access type.

Connection-oriented And Connection-less WAP

The A2628 supports both connection-less and connection-oriented WAP over GSM Data. The user can select which method to use. In general, connection-oriented means that the connection between the WAP browser in the phone and the WAP Gateway is maintained in a session with error recovery services. This gives a high reliability with a reduced risk of errors in the transmission, and improves efficiency in WAP browsing.

Security Using WAP

The A2628 is based on the WAP 1.1 specifications where security functionality is specified with a technology called Wireless Transport Layer Security (WTLS).

The WAP protocols that handle the connection, its transport and its security are structured in protocol layers. The security is handled by the WTLS layer operating above the transport protocol layer. The WTLS layer is modular and there are WTLS classes that indicate which security level is supported by the application.

- WTLS class 1 specifies an encoding of the information.
- WTLS class 2 includes class 1 and in addition a server authentication, where server certificates are needed in the phone (access lock).
- WTLS class 3 includes class 2 and in addition a client certification, where client certificates are needed for the user (signature lock).

The A2628 supports WTLS class 2, and it is equipped with a number of certificates. An access lock is needed when accessing certain WAP sites. The user is asked to enter it before a secure WAP connection is established.

Over-The-Air Provisioning Of WAP Settings

To simplify configuring WAP settings in a number of phones, all settings can be sent as an SMS message to each phone. This makes it easy for an operator, a service provider or a company to distribute settings for Internet/Intranet, and WAP, without having to configure each phone manually. This also makes it easy to upgrade the services provided to the users, without the need for users to perform any manual configuration.

- The OTA configuration message is distributed via SMS point-to-point
- The setup information is a binary encoded XML message, according to WBXML. To receive information about OTA specifications, please contact your local Ericsson representative for consumer products. A configurator that utilizes OTA provisioning can be tested on the Ericsson Mobile Internet
- The user is not alerted about new settings until the ongoing browsing session ends. Furthermore, settings are not changed during an ongoing browsing session
- The necessary user interaction is limited to receiving and accepting/rejecting the configuration message, and selecting which WAP profile to allocate the settings to
- Security can be handled using a keyword identifier displayed on the screen as a shared secret between the SMS sender and the receiver. It is important that the user has a way to verify that the configuration message is authentic

Configuration Of WAP Settings

To perform the WAP configuration of a single phone it is suggested to use the step-by-step WAP configurator provided on the Ericsson Mobile Internet. The configurator utilizes OTA provisioning, and it is available on <http://mobileinternet.ericsson.com>, no login required. The WAP settings can also be customized by the operator.

A manual configuration is made using the menu system in the phone. This is described in the User's Guide.

CONNECTIVITY

The Mobile Office DI 28 infrared modem (optional accessory) turns the A2628 into a wireless modem using AT commands. This provides data and e-mail communication, as well as Internet/Intranet access, for a connected PC, PDA or handheld device.

In the A2628, AT commands are used both for:

- controlling the data communication between the PC and the remote service. This requires the Mobile Office DI 28 infrared modem (optional accessory).
- configuring and requesting settings and behaviours in the phone, from a connected PC or PDA. This requires the Mobile Office DI 28 infrared modem (optional accessory), or the RS-232 cable DRS-10 (optional accessory).

Infrared Modem

When the Mobile Office DI 28 infrared modem (optional accessory) is connected, the A2628 connects using infrared to a PC, a PDA, a laptop PC or another phone or mobile device. Infrared communication creates a data link between two communications devices through an infrared beam of light. Key benefits using A2628 with the infrared modem:

- True wireless communication
- Low power consumption
- Secure data transmission with the IrDA DATA standard
- Send and receive e-mail and data on the connected PC/PDA
- Connect to the Internet or Intranet/LAN from the connected PC/PDA

By using Mobile Office DI 28, you can also manage the phone book, send SMS and personalize the start-up and shut-down shows.

Please refer to further information about the Ericsson Mobile Office DI 28 infrared modem, available at <http://www.ericsson.com>.

Cable Connection

The RS-232 cable DRS-10 (optional accessory) makes it possible to connect the A2628 to a PC or PDA. This provides access to configuration settings in the phone. Also, you can personalize the start-up and shut-down shows.

Please refer to further information about the RS-232 cable DRS-10, available at <http://www.ericsson.com>.

FUNCTIONS AND FEATURES

In-phone Functions And Features

Profiles

The profile feature; group of settings preset to suit a certain environment. The profiles are also related to intelligent accessories such as a desktop charger, a portable or vehicle handsfree; useful for company integration with call forwarding etc.

The easiest way to set up the profiles in one or several phones, is by using the Ericsson Phone Settings program, included in the Mobile Office DI 28 infrared modem (optional accessory).

Voice Answering And Dialling

The A2628 supports voice answering and dialling, which makes it possible to interact with the phone using spoken commands. This is useful for handsfree use of the telephone. The functions include:

- Voice dial - call someone by saying the name and number type, e.g “John, home”
- Answer and reject calls with your voice when using a handsfree kit

Phone Book

In a company or an organization, you may need to deploy several phones with a common set of phone book entries. This can be done in one of the following ways:

- Use your PC to prepare the common phone book entries and transfer them from the PC to each and every phone. Necessary software is included in the Mobile Office DI 28 infrared modem (optional accessory).

or

- Prepare the phone book on one SIM card in one phone. Copy the contents from this SIM card to the phone's memory, then put each one of all the other SIM cards into the phone and copy the contents of the phone's memory to them. See the User's Guide.

Start-up And Shut-down Shows

The A2628 has built-in start-up and shut-down shows that feature a short animation with a melody. It is possible to create your own shows with a personal picture and melody. This option is called “My Animation”, and it can be managed in two ways:

- Use the Mobile Office DI 28 infrared modem (optional accessory). The Phone Settings software includes a function that lets the user change the start-up and shut-down animation and install it on the A2628.

or

- Connect the phone to a PC using the RS-232 cable DRS-10 (optional accessory). The necessary program “My Animation” for personalizing the start-up and shut-down shows can be found on the Ericsson Mobile Internet. This is available on <http://mobileinternet.ericsson.com>.

More In-phone Functions And Features

- Alphabet input (Arabic, Chinese, Cyrillic, Greek and Hebrew)
- Alarm Clock
- Automatic retry
- Background light
- Calculator
- Chinese text input (Stroke, Pinyin and Bopomofo)
- Clock
- Ericsson ring signal logotype
- External Antenna Connector
- Full graphic display 4 rows of text
- Games
- Help texts and shortcuts
- Language selection
- Last dialled numbers
- Last received number redial
- Menu shortcuts
- Missed calls list
- Personal ring types
- Received calls list
- Ring signal composition
- Speed dialling
- Status view
- Stopwatch
- Timer
- WAP browser and services

Network-Dependent Features

SMS Messaging

The A2628 is capable of sending and receiving SMS messages.

- With the Short Message Service, a user can send text messages containing up to 160 characters to and from GSM mobile stations

A Service Centre (SC) acts as a storage and forwarding centre. The A2628 also supports using SMS as a bearer type for connecting to WAP.

SMS consists of two basic services:

- Mobile Originated SMS (from a mobile station to an SMS-C)
- Mobile Terminated SMS (from an SMS-C to a mobile station)

For Mobile Originated SMS, an SMS message is sent from a Mobile Station to the SMS-C where it is forwarded to its destination. This can be another Mobile Station, or a terminal in the fixed network.

A Mobile Terminated SMS is when an SMS message is forwarded from the SMS-C to a Mobile Station. When the Mobile Station receives the message, it returns a delivery report saying the transfer was successful.

The A2628 also lets you save those often-used messages as templates. You can save up to ten templates consisting of up to twenty-five characters each in the phone's memory. The A2628 also features an SMS counter allowing you to keep track of SMS messages that you have sent.

Fixed Dialling And Restricted Calls

For a company or an organization, it can be useful to restrict phone calls. Fixed Dialling allows you to preset a number of digits, for example area codes. This restricts the user to making calls only to numbers which use the preset digits as leading digits. Fixed Dialling makes use of the PIN2, and it requires fixed dial fields on the SIM Card. Check with your Operator about this feature.

Restricted calls allows you to block outgoing or incoming calls in certain situations, for example international calls.

More Network-dependent Features

- Advice of Charge Charging
- Advice of Charge Information
- Automatic time zone
- Call barring
- Call forwarding
- Call hold
- Call screening
- Call transfer
- Call wait
- Calling Line Identification CLI
- Closed User Groups
- Conference calls
- EFR Enhanced Full Rate Speech Coding

- e-GSM
- FR Full Rate Speech Coding
- GSM 900/1800 Dual band
- GSM phase 2+
- HR half rate speech coding
- Home zone indication
- International roaming
- Phone book on SIM
- SIM Application Toolkit
- Two line service / Alternate Line Service (ALS)
- Voice mail
- WAP 1.1
- WTLS class 2

SIM APPLICATION TOOLKIT

The SIM Application Toolkit (SIM AT) is a smartcard-centric method of deploying programs that apply only to GSM and to SMS and USSD transports. Programs must be distributed on smartcards. WAP is an Internet-centric method of deploying programs that is independent of network technology. Programs and content are kept centrally on web servers and downloaded as required. While there is some overlap, WAP is a particularly good choice when deploying programs that also have an HTML version for desktop use. Work is currently underway on building interfaces between the two technologies.

For an operator, a company or service provider, SIM AT offers a powerful way to deploy programs and services to users, without the need for new or upgraded equipment. All necessary setup and programming is distributed to the users over the air, directly to their phones. In the A2628, a separate menu is available for functions residing on the SIM card. These can include submenus for controlling functions, and also functions which allow the phone to initiate calls, send data, and display information for the user.

SIM AT Services Supported By The A2628

Service	Mode	Support in A2628
CELL BROADCAST DOWNLOAD		Yes
DISPLAY TEXT	bit 1: 0 = normal priority	Yes
	1 = high priority	Yes
	bit 8: 0 = clear message after a delay	Yes
	1 = wait for user to clear message	Yes
GET INKEY	General: The GET_INKEY requires that the user press “Yes” to confirm his/her choice	Yes
	bit 1: 0 = digits (0-9, *, # and +) only	Yes
	1 = alphabet set	Yes
	bit 2: 0 = SMS default alphabet	Yes
	1 = UCS2 alphabet	Yes
	bit 3: 0 = character sets defined by bit 1 and bit 2 are enabled.	No
	1 = character sets defined by bit 1 and bit 2 are disabled and the “Yes/No” response is requested.	No

Service	Mode	Support in A2628
GET INPUT	General: No of hidden input characters.	20
	bit 1: 0 = digits (0-9, *, # and +) only	Yes
	1 = alphabet set	Yes
	bit 2: 0 = SMS default alphabet	Yes
	1 = UCS2 alphabet	Yes
	bit 3: 0 = ME may echo user input on the display	Yes
	1 = user input not to be revealed in any way (see note)	Yes
	bit 4: 0 = user input to be in unpacked format	Yes
	1 = user input to be in SMS packed format	Yes
	bit 8: 0 = no help information available	Yes
	1 = help information available	No
MORE TIME		Yes
POLLING OFF		Yes
POLL INTERVAL		Yes
PROVIDE LOCAL INFORMATION	'00' = Location Information (MCC, MNC, LAC and Cell Identity)	Yes
	'01' = IMEI of the ME	Yes
	'02' = Network Measurement results	No
	'03' = Date, time and time zone \$(DTTinPLI)\$	No
REFRESH	General: The reset option requests the user to turn off and turn on the mobile.	Yes
	'00' =SIM Initialization and Full File Change Notification;	Yes
	'01' = File Change Notification;	Yes
	'02' = SIM Initialization and File Change Notification;	Yes
	'03' = SIM Initialization;	Yes
	'04' = SIM Reset;	Yes
SELECT ITEM		Yes
SEND SHORT MESSAGE	bit 1: 0 = packing not required	Yes
	1 = SMS packing by the ME required	Yes
SEND SS		Yes

Service	Mode	Support in A2628
SET UP CALL	General: Capability configuration	Yes
	Setup speech call CallParty Subaddress	No
	DTMF support	Yes
	'00' = set up call, but only if not currently busy on another call;	Yes
	'01' = set up call, but only if not currently busy on another call, with redial;	Yes
	'02' = set up call, putting all other calls (if any) on hold;	Yes
	'03' = set up call, putting all other calls (if any) on hold, with redial;	Yes
	'04' = set up call, disconnecting all other calls (if any);	Yes
	'05' = set up call, disconnecting all other calls (if any), with redial;	Yes
SET UP MENU		Yes
SMS PP DOWNLOAD		Yes
START MENU		Yes

User Interaction With SIM AT

DISPLAY TEXT	A text string of up to 160 characters (80 UCS coded) is supported.
Text clearing times	10-20 seconds. 60-second timeout limit for the user to clear the text.
'Key' responses	'Long NO' – Proactive session terminated by user. 'NO' – Backward move in proactive session. Any other key clears display if the command is performed successfully.
GET INKEY	Prompt for a one character input. Pressing 'YES' without entering a character gives warning message "Minimum 1 character".
'Key' responses	'CLR' clears current character. 'Long NO' terminates the proactive session. 'NO' – Backward move in proactive session. 'YES' – Command performed successfully.
GET INPUT	Prompt for character input. Pressing 'YES' without entering a character gives warning message "Minimum 'no' characters". The phone will refuse to accept further input when maximum response length is exceeded.
MMI Maximum Response lengths	Digits Only – xx characters SMS default alphabet characters – 160 characters Hidden Characters (Digits Only) – 20 characters
'Key' responses	'CLR' clears current character/characters. 'Long No' terminates the proactive session 'NO' – Backward move in proactive session 'YES' – Command performed successfully

REFRESH	A requirement to turn the phone off and then on again can be sent to the user with the text 'Operator has updated your SIM! Restart phone to update!'.
SELECT ITEM	Scroll to highlight item for selection. The maximum number of items supported by the phone within one Select Item command, is 30.
'Key' responses	Down arrow – Scroll down list Up arrow – Scroll up list Long No' terminates proactive session 'NO' – Backward move in proactive session 'YES' – Command performed successfully
SEND SHORT MESS.	Default message "Sending message Please wait" can be replaced for the Alpha Identifier text, or suppressed completely if a null text is provided. Responses are "MESSAGE FAILED" or MESSAGE SENT".
'Key' responses	'Long No' or 'NO' terminates the proactive session
SET UP CALL	If the ME is on a call when the command 'Set up Call, putting all other calls on hold' is sent, the user will see the text 'Setting up a call current call will be held'. If the 'YES' key is pressed the current call will be put on hold and the new call set up. If the ME is on a call when the command 'Set Up Call, disconnecting all other calls' is sent, the user will see the text 'Setting up a call current call will be disconnected'. If the 'YES' key is pressed the current call will be disconnected and the new call set up.
SET UP MENU	Incorporates a SIM Application Toolkit Menu Item into the ME's main menu structure. From the standby display the right or left arrow buttons can be pressed to select the Menu Items. (Note: The SIM AT menu option is found in the 'Extras' menu.) If an Alpha Identifier is supplied in the Set Up Menu command this is used as the SIM AT entry in the ME's main menu. If no alpha identifier is supplied and only one item provided, then this item is used as header. If no alpha identifier is supplied and several items are found in the menu, a default title is used. If the SIM AT Menu Item is selected using the 'YES' key all the items sent in the Set Up Menu command will be available for selection, in the same way as the Select Item command. A limit of 30 menu items has been set within this command.
'Key' responses	Down arrow – Scroll down list Up arrow – Scroll up list Side key: Scrolls the menu 'YES' – Envelope (Menu Selection)

TERMINOLOGY AND ABBREVIATIONS

3GPP	3rd Generation Partnership Project.
Bearer	The method for accessing WAP from the phone, for example GSM Circuit Switched Data (CSD) and SMS.
Bookmark	A URL and header/title stored in the phone.
Calling Line Identification (CLI)	Shows the number of the person calling you in your mobile phone display. You can then make an informed choice as to whether or not to take the call. Bear in mind that not all numbers can be displayed. To use this service, it must be supported by your network.
CGI	Common Gateway Interface.
DTMF or Touch Tone	Dual Tone Multi-Frequency signal – codes sent as tone signals. Used for telephone banking, accessing an answering machine, etc.
e-GSM	Extended GSM, e-GSM, are new frequencies specified by the European Radio communications Committee (ERC) for GSM use when additional spectrum is needed (Network-dependent). It allows operators to transmit and receive just outside GSM's core 900 frequency band. This extension gives increased network capability, which favours both the user and the operators.
EFR	Enhanced Full Rate, speech coding.
FR	Full Rate, speech coding.
Gateway	A WAP Gateway typically includes the following functions: - A Protocol Gateway – the protocol gateway translates requests from the WAP protocol stack to the WWW protocol stack (HTTP and TCP/IP). - Content Encoders and Decoders – the content encoders translate Web content into compact encoded formats to reduce the size and number of packets traveling over the wireless data network.
GIF	Graphics Interchange Format.
GSM	Global System for Mobile Communications. GSM is the world's most widely-used digital mobile phone system, now operating in over 100 countries around the world, particularly in Europe and Asia-Pacific.
GSM 900	The GSM systems family includes GSM 900, GSM 1800 and GSM 1900. There are different phases of roll-out for the GSM system and GSM phones are either phase 1 or phase 2 compliant.
GSM 1800	Also known as DCS 1800 or PCN, this is a digital network working on a frequency of 1800 MHz. It is used in Europe and Asia-Pacific.
HR	Half Rate, speech coding.
HTML	HyperText Markup Language.
HTTP	HyperText Transfer Protocol.
IrDA	Infrared Data Association.
LAN	Local Area Network.
ME	Mobile Equipment.
MMI	Man-machine interface.
OTA	Over-the Air Configuration. To provide settings for the phone by way of sending a message, SMS, over the network to the phone. This

	reduces the need for the user to configure the phone manually.
PDA	Personal Digital Assistant.
Phone book	A memory in your mobile phone or SIM card where phone numbers can be stored and accessed by name or position.
SC	Service Centre (for SMS).
Service Provider	A company that provides services and subscriptions to mobile phone users.
SIM card	Subscriber Identity Module card – a card that must be inserted in any GSM-based mobile phone. It contains subscriber details, security information and memory for a personal directory of numbers. The card can be a small plug-in type or credit card-sized but both types have the same functions. Your phone uses the small plug-in card.
SMS	Short Message Service. Allows messages of up to 160 characters to be sent and received via the network operator's message centre to your mobile phone. Messages are stored if the phone is off or out of reach ensuring that they reach you. To use this service, it must be supported by your network.
SS	Supplementary Services.
TCP/IP	Transmission Control Protocol/Internet Protocol.
URL	Uniform Resource Locator.
USSD	Unstructured Supplementary Services Data.
WAN	Wide Area Network.
WAP	Wireless Application Protocol. Handheld devices, low bandwidth, binary coded, a deck/card metaphor to specify a service. A card is typically a unit of interaction with the user, that is, either presentation of information or request for information from the user. A collection of cards is called a deck, which usually constitutes a service.
WAP Application	A collection of WML cards, with the new context attribute set in the entry card.
WAP service	A WML application residing on a web site.
WBMP	WAP Bitmap.
WDP	Wireless Datagram Protocol.
WML	Wireless Markup Language. A markup language used for authoring services, fulfilling the same purpose as HyperText Markup Language (HTML) does on the World Wide Web (WWW). In contrast to HTML, WML is designed to fit small handheld devices.
WMLScript	WMLScript can be used to enhance the functionality of a service, just as for example JavaScript may be utilized in HTML. It makes it possible to add procedural logic and computational functions to WAP-based services, for example.
WSP	Wireless Session Protocol.
WTLS	Wireless Transport Layer Security.
WWW	World Wide Web.
XML	Extensible Markup Language.

RELATED INFORMATION

Documents

- The A2628 User's Guide
- Mobile Phones R520, T20, A2628 Developers' Guidelines WAP Services
- WAP 1.1 Specification

Links

- <http://mobileinternet.ericsson.com> - a site for the mobile phone user
- <http://www.ericsson.com/wap> - a site for information on WAP
- <http://www.ericsson.com/mobilityworld> - information, tools, white papers and software updates on Ericsson products and technologies; check frequently!
- <http://www.etsi.org> - home of the European Telecommunications Standards Institute
- <http://www.wapforum.org> - home of the WAP Forum

APPENDIX: TECHNICAL SPECIFICATIONS

The consumer pack includes

- 1 Mobile Phone A2628
- 1 Standard Capacity Battery BSC-11 (750 mAh) *)
- 1 Standard Charger CST-10 **)
- 1 Ericsson service and support leaflet
- 1 User's Guide
- 1 Charger and Battery leaflet
- 1 Accessory leaflet

*) *Lithium High Capacity Battery will be offered for customisation.*

**) *Depending on configuration of consumer pack.*

General

Product name	A2628s/A2628sc
System	GSM phase 2 recommendations. GSM 900 (CTR 19 and CTR 20) and GSM 1800 (CTR 31 and CTR 32), e-GSM supported
Speech coding	HR, FR, EFR supported where available, for high speech quality
SIM card	Small plug-in card, 3V or 5V type
Type number A2628s	1101502-BV
Type number A2628sc	1101502-CN

Exterior Description

Size	131 x 51 x 25 mm
Weight	with standard battery 140g
Display size	101 pixels wide, 54 pixels high
Graphic display	black and white
Text rows	up to 4 rows of text
Colours	Reliance Astral Blue, Premium Celestial Black, Reliance Green Pepper, Reliance Pistachio Yellow
Keypad	17 keys and two volume side keys

Ambient Temperatures

Operating	Max: +55°C, Min -10°C
Storage	Max: +70°C, Min -40°C
Charging	Max: +45°C, Min +5°C

Supported Man-Machine Interface (MMI) languages

Depending on software in the phone, these languages are supported:

Arabic (AR), Bulgarian (BG), Czech (CS), Chinese traditional Hong Kong (ZH), Chinese simplified (ZS), Chinese Traditional Taiwan (ZT), Croatian (HR), Danish (DA), Dutch (NL), English (EN), Estonian (ET), Farsi (FA), Finnish (FI), French (FR), German (DE), Greek (EL), Hebrew (IW), Hungarian (HU), Indonesian-Bahasar (IN), Italian (IT), Latin American Spanish (XL), Latvian (LV), Lithuanian (LT), Malaysian-Bahasar (MS), Norwegian (NO), Philippine-Tagalog (TL), Polish (PL), Portuguese (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovakian (SK), Slovenian (SL), Spanish (ES), Swedish (SV), Thai (TH), Turkish (TR), Vietnamese (VI)

Performance And Technical Characteristics

Dimension	GSM 900/E-GSM 900	GSM 1800
Frequency range	TX: 880 – 914 MHz RX: 925 – 959 MHz	TX: 1710 – 1785 RX: 1805 – 1880
Channel spacing	200 kHz	200 kHz
Number of channels	174 Carriers *8 (TDMA)	374 Carriers *8 (TDMA)
Modulation	GMSK	GMSK
TX Phase Accuracy	< 5° RMS Phase error (burst)	< 5° RMS Phase error (burst)
Duplex spacing	45 MHz	95 MHz
Frequency stability	+/- 5 ppm (downlink RX)	+/- 175 Hz (downlink RX)
Voltage operation (nominal)	3.0 Volts	3.0 Volts
Transmitter RF power output	33 dBm Class 4 (2W peak)	30 dBm Class 1 (1W peak)
Transmitter Output impedance	50 Ω	50 Ω
Transmitter Spurious emission	< -36 dBm up to 1 GHz < -30 dBm over 1 GHz (according to GSM spec.)	< - 30 dBm (according to GSM spec.)
Receiver RF level	Better than – 102 dBm	-100 dBm
Receiver RX Bit error rate	< 2%	< 2.43%

**) No DTX activated*

Current Consumptions, Talk And Standby Times

Dimension	GSM 900	GSM 1800
Transmission current	120 mA (min) 286 mA (max)	120 mA (min) 240 mA (max)
Standby current	5.9 mA (min), (paging rate 9, 1 neighbour present) 9.3 mA (max), (paging rate 2, 16 neighbours present)	5.9 mA (min), (paging rate 9, 1 neighbour present) 9.3 mA (max), (paging rate 2, 15 neighbours present)
High Capacity Battery BHC-10 (1400 mAh)	Talk time	4 to 11.5 hours
	Standby time	150 to 235 hours (up to 9 days)
Standard Capacity Battery BSC-11 (750 mAh)	Talk time	2.5 to 6 hours
	Standby time	80 to 125 hours (up to 5 days)

Speech Coding

Dimension	Full rate	Enhanced full rate
Type	RPE/LPC with LTP	ACELP
Bit rate	13.0 Kbps	12.2 Kbps
Frame duration	20 ms	20 ms
Block length	260 bits	244 bits
Class 1 bits	182 bits	
Class 2 bits	78 bits	

WAP Browser Technical Data

Feature	Support in the A2628 WAP browser
Authentication	WAP 1.1. Server applications may request Basic Authentication. Gateway may request Authentication during connection setup.
Back to previous page	Yes
Bearer type GSMDData (IP)	Yes, ISDN and analog
Bearer type SMS	Yes (point-to-point)
Bookmarks	Yes, up to 9 named bookmarks for easy access to frequently visited pages
Cache	Runtime cache: Yes
	Persistent cache: No
Character sets *	UTF8 (Default), USAASCII, Latin1, UCS2
Colour	1 bit (b/w)
Home page	Yes, up to 3 different, one for each WAP profile
Hyperlinks in Text	Yes, highlighted by inverse video
Hyperlinks in Images	Yes, indicated by a frame
Image Animation	No
Image Formats	GIF (interlaced and non-interlaced), WBMP, no transparent layers.
Network Settings	Up to 3 different settings available by selecting WAP profile (Intranet, Internet, Banking, Gateway etc)
OTA Support	Yes
PPP Authentication	PAP, CHAP and MS-CHAP
Reload page	Yes
Tables	Yes
WAP/WML	WAP 1.1 compliant, WMLScript Layers implemented: WAE, WSP, WDP
WAP profiles	3 WAP profiles, each with its own settings
WTLS (security)	WTLS class 1 - Encoding
	WTLS class 2 - Encoding + Server Authentication. Root Certificates predefined in phone: Verisign, Entrust, Baltimore, Globalsign. More certificates will be supported in future revisions.

**) When creating WML applications, it is recommended always to save the page contents as UTF8, and that this is clearly indicated in the pages before publishing. This ensures that the contents of the application can be viewed, regardless of character sets used in gateways and the phone. All characters are not supported in all phones. The software version depends on which market the phone is associated to. Also, please note that the phone may not support input on a WAP Service which uses certain characters (MMI languages), even if those characters are supported for browsing in the phone.*

Index

A

Abbreviations 19

B

Bearer type characteristics 7

C

Configuration of WAP 9

Connection-less WAP 8

Connection-oriented WAP 8

Connectivity 10

D

Documents 21

F

Fixed dialling 13

Functions and features 11

G

Gateway 8

GSM Data access characteristics 7

GSM system support 22

L

Languages, MMI 22

Links 21

M

My animation 12

O

Online services 15

Over the air provisioning 9

P

Phone book 11

Preface 4

Product description 5

Profiles 11

Purpose of this document 4

R

Related information 21

Restricted calls 13

S

Security using WAP 8

Short message service 13

Shut-down show 12

SIM application toolkit 15

SIM card type 22
SMS access characteristics 7
SMS messaging 13
Standby time 24
Start-up show 12
Supported MMI languages 22

T

Talk time 24
Technical specifications 22
Terminology and abbreviations 19

U

User interaction with SIM AT 17
Using WAP in Ericsson A2628 6

V

Voice answering and dialling 11

W

WAP configuration using PC 9
WAP in Ericsson A2628 6
WAP services 6
Weight 22